



2027/2000P1
Standard Incandescent

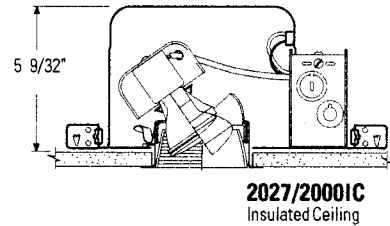

2027/2000IC
Insulated Ceiling

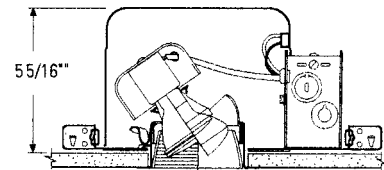

2027/2000AIC
Air Seal® Insulated Ceiling

Complete Fixture consists of Reflector Trim & Frame-In Kit. Select each separately.

Reflector Trim		Frame-In Kit — See Individual Frame-In Kit Specification Sheets			
2027†	Matte Black Step Baffle	Incandescent			
2027WH	Matte White Step Baffle	Frame-In Kit	Installation Type	Lamping	Height
2029CL†	Specular Clear	2000P1	Standard Non-IC	50W PAR20 75W PAR16, R20	5 9/32"
2029CD†	Clear Diffuse	2000IC	IC	50W, PAR 20	5 9/32"
2029GD†	Specular Gold	2000AIC	IC	45W PAR16	5 5/16"
2029BK†	Specular Black				
2027BNM	Natural Metal™ baffle with Natural Metal™ Flange				

† = add "NM" to sku for Natural Metal™ Flange

Features

- 1. Aperture:** Aluminum step baffle or cone.
- 2. Lamp Holder Assembly:** Provides 358° horizontal rotation and 0° – 35° vertical adjustment.
- 3. Trim Housing:** Hydroformed aluminum 0.040" (16 ga.) thick. Matte white Natural Metal™ trim flange.
- 4. Frame-In Kit:** (2000P1 standard frame shown.) Other frame shown on the right. See Frame-In Kit specification sheets for more details.


Labels

UL (Suitable for Damp Locations), I.B.E.W

US Patent Numbers: 5,045,985

Job Information	Type:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	

Lightolier a Genlyte company www.lightolier.com
 631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
 We reserve the right to change details of design, materials and finish.
 © 2006 Genlyte Group LLC • B0906



Lighting Performance Data

PAR Lamps:		Narrow				Medium													
L	Beam length	W	Beam width	50W PAR20 NSP (T-H)	55W PAR16 NSP (T-H)	50W PAR20 NFL (T-H)	55W PAR16 NFL (T-H)												
D	Distance	A	Aiming angle																
FC	Footcandles	Data based on bare lamp photometrics. Dashed lines in beam spreads indicate narrow axes of oval shaped beams. L and W are the outer points where the candlepower drops to 50% of the maximum. FC is the initial footcandles at the center of beam.																	
	Footcandles (On Beam Center at 6')			128	139	35	36												
	Beam Spread (To 50% Max. CP)			12°	12°	32°	30°												
	Max. Candlepower (Candelas)			4600	5000	1250	1300												
	Rated Life (Hours)			2000	2000	2000	2000												
0° AIMING ANGLE				D		FC		L		W									
Illumination on Horizontal Plane				6'	128	1.3'	1.3'	6'	139	1.3'	1.3'	3'	139	1.7'	1.7'	3'	144	1.6'	1.6'
				8'	72	1.7'	1.7'	8'	78	1.7'	1.7'	5'	50	2.9'	2.9'	5'	52	2.7'	2.7'
				10'	46	2.1'	2.1'	10'	50	2.1'	2.1'	7'	26	4.0'	4.0'	7'	27	3.8'	3.8'
				12'	32	2.5'	2.5'	12'	35	2.5'	2.5'	9'	15	5.2'	5.2'	9'	16	4.8'	4.8'
30° AIMING ANGLE				D		FC		L		W		D		FC		L		W	
Illumination on Horizontal Plane				5'	120	1.4'	1.2'	5'	130	1.4'	1.2'	3'	90	2.4'	2.0'	3'	94	2.2'	1.9'
				7'	61	2.0'	1.7'	7'	66	2.0'	1.7'	5'	32	3.9'	3.3'	5'	34	3.7'	3.1'
				9'	37	2.5'	2.2'	9'	40	2.5'	2.2'	7'	17	5.5'	4.6'	7'	17	5.1'	4.3'
				11'	25	3.1'	2.7'	11'	27	3.1'	2.7'	9'	10	7.1'	6.0'	9'	10	6.6'	5.6'
30° AIMING ANGLE				D		FC		L		W		D		FC		L		W	
Illumination on Vertical Plane				2'	144	1.7'	0.8'	2'	156	1.7'	0.8'	1'	156	3.0'	1.1'	1'	163	2.7'	1.1'
				3'	64	2.6'	1.3'	3'	69	2.6'	1.3'	2'	39	6.1'	2.3'	2'	41	5.5'	2.1'
				4'	36	3.5'	1.7'	4'	39	3.5'	1.7'	3'	17	9.1'	3.4'	3'	18	8.2'	3.2'
				5'	23	4.3'	2.1'	5'	25	4.3'	2.1'	4'	10	12.2'	4.6'	4'	10	10.9'	4.3'

Beam Center Location



This chart locates the distance **C** to the center of the light beam for various distance **D** when the lamp is aimed 30° from vertical, the preferred aiming angle for lighting pictures on the wall,

Distance D (ft.)	1	2	3	4	5	6	7	8	9	10
Distance C (ft.)	1.7	3.5	5.2	6.9	8.7	10.4	12.1	13.8	15.6	17.3

Job Information

Type:

Lightolier a Genlyte company www.lightolier.com
 631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
 We reserve the right to change details of design, materials and finish.
 © 2006 Genlyte Group LLC • B0906